

Z-PAK® HC SERIES

High Capacity Rigid Cell

- Low Pressure Drop and Superior Service Life
- Two Individual Dual Ply Synthetic Media Layers
- Injection Molded Pleat Separators
- Header or Box Styles
- High Dust Holding Capacity
- Ideal for VAV Systems

FEATURES >

Glasfloss Z-Pak HC air filters are designed for high efficiency applications and feature very low pressure drop, two individual filtration media layers and superior service life. The Z-Pak HC's total rigid construction makes it ideal for variable air volume systems (VAV), where changes in air flow can have an adverse effect on non-rigid type filters. Z-Pak HC filters are designed to handle high airflow and are available in MERV 14 performance.


The Glasfloss Z-Pak HC Series frame shall be a rigid construction of 26 gauge galvanized steel. A heavy gauge galvanized steel header is optional for the Z-Pak HC Series.

The two distinct filtration media layers shall be a high density synthetic fiber blend. The filter media pack shall be constructed by pleating continuous sheets of media into uniform spaced pleats, which are separated and secured by flame retardant, injection molded plastic media separators. Heavy duty expanded metal shall be bonded and secured between the two layers of media. The heavy duty expanded metal shall be galvanized to resist rust and corrosion.

Metal vertical brackets shall be utilized to stabilize the media pack and prevent air bypass. The air entry and air exit side shall be fitted with two 26 gauge support struts. The pleated media ends are sealed and secured to the top and bottom of the metal frame to prevent air bypass.

Gasket material, 3/4" in width and 1/4" in thickness, is optional. Glasfloss Z-Pak HC series filters shall be rated to withstand temperatures up to 180 degrees Fahrenheit. Glasfloss Z-Pak HC filters shall be Classified under U.L. std. 900.

< **SPECIFICATIONS**

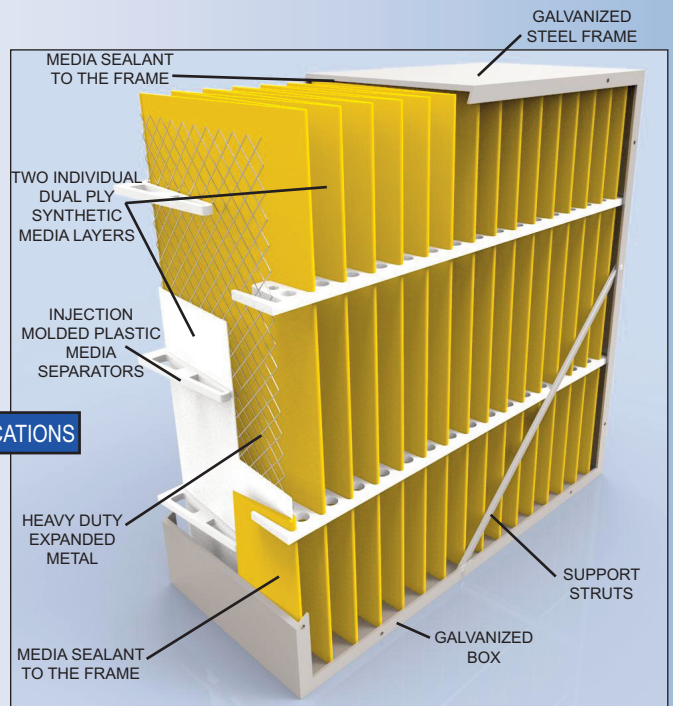

Z-PAK HC SYNTHETIC SERIES

BASE MODEL NUMBER	SIZE W x H x D NOMINAL	SIZE W x H x D EXACT	RATED VELOCITY FPM	INITIAL RESIST. IN. W.G.		FINAL RESIST. IN. W.G.	MEDIA SQUARE FOOTAGE	
				BOX	HEADER		BOX	HEADER
MERV 14								
ZPS242412	24 X 24 X 12	23-3/8 X 23-3/8 X 11-1/2	500	.28	.35	1.50	58.33	52.50
ZPS122412	12 X 24 X 12	11-3/8 X 23-3/8 X 11-1/2	500	.28	.35	1.50	29.17	26.25
ZPS202412	20 X 24 X 12	19-3/8 X 23-3/8 X 11-1/2	500	.28	.35	1.50	47.40	42.66


Tolerances shall be +/- 1/16" for width and height. The frame depth shall not exceed 11-1/2".
Header thickness shall be 13/16". Performance values based on ASHRAE and in-house testing methods.

PART NUMBER CONFIGURATION

PREFIX	MEDIA	FILTER SIZE	EFFICIENCY	FRAME STYLE	GASKET LOCATION	SUFFIX
□ ZP	□ S = SYNTHETIC	□ NUMERICAL SIZE OF FILTER i.e 242412	□ 95 = 90-95% (MERV 14)	□ B = BOX H = HEADER DH = DOUBLE HEADER	□ O = NO GASKET BOX STYLE A = AIR EXIT B = AIR ENTRY C = AIR ENTRY/EXIT D = SIDE LOAD SINGLE HEADER E = AIR ENTRY/EXIT F = AIR ENTRY H = AIR EXIT J = SIDE LOAD DOUBLE HEADER K = AIR ENTRY/EXIT M = AIR ENTRY P = AIR EXIT Q = SIDE LOAD	□ HC


STANDARD PRESSURE DROP

Test Filter Size 24" x 24" x 12" Nominal

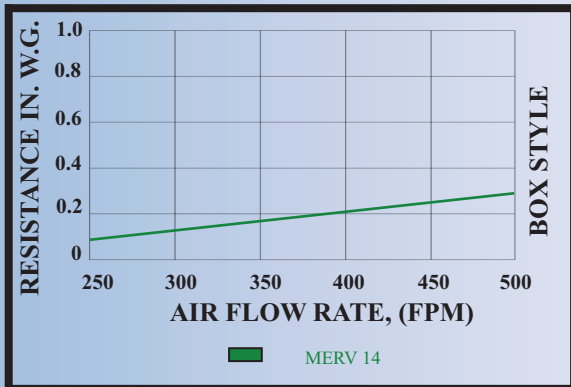

MINIMUM PARTICLE SIZE EFFICIENCY

Test Filter Size 24" x 24" x 12" Nominal

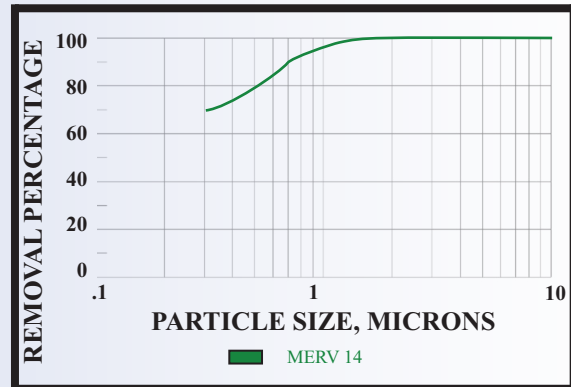

Distributed by:



"Serving You With Locations Throughout The Nation"